


19" DYNAmax

Free Standing Server Cabinets

Width: 800 mm
Depth: 1000 mm

Exploded View

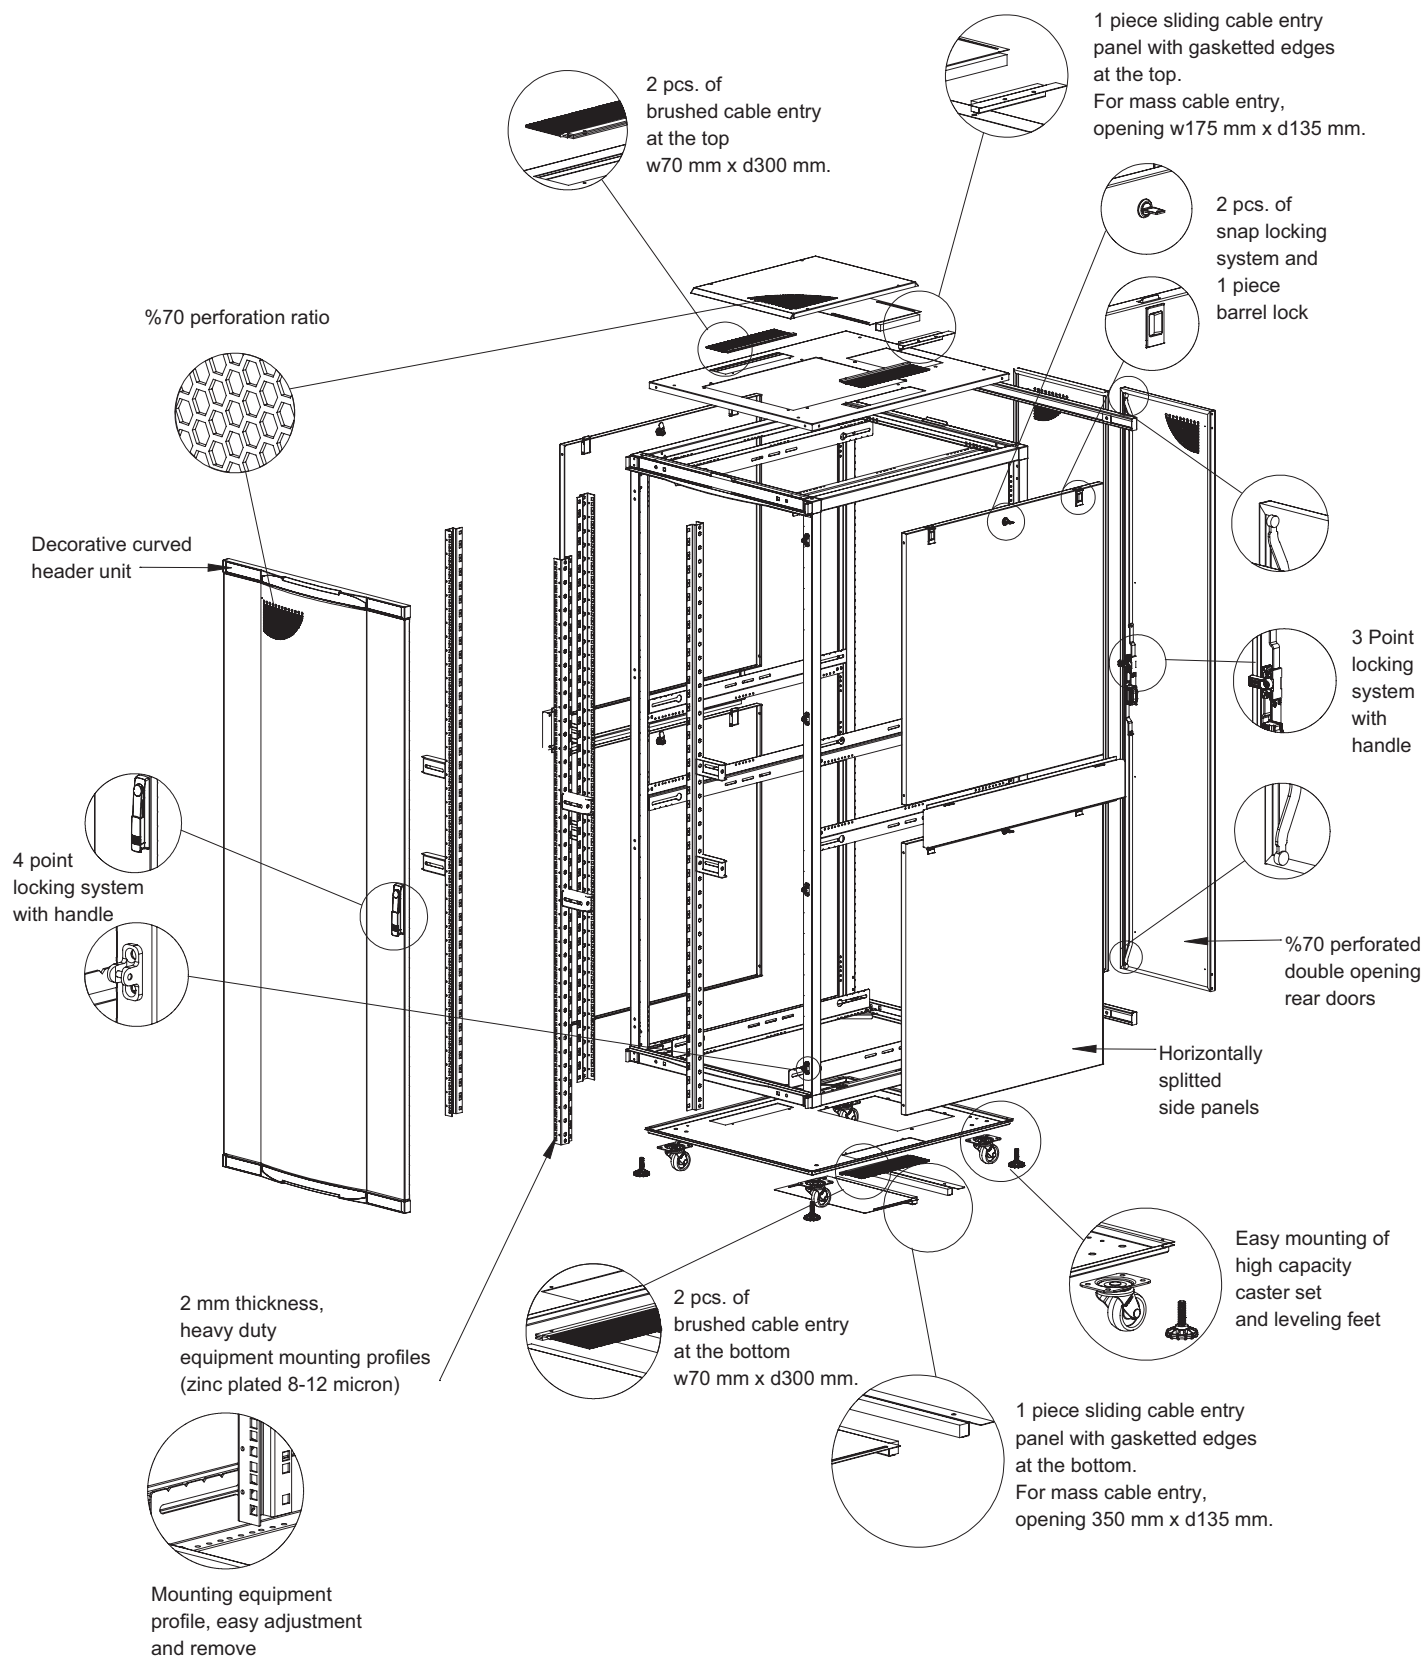


19" DYNAmax


Free Standing Server Cabinets

Construction Drawings


Width: 800 mm
Depth: 1000 mm

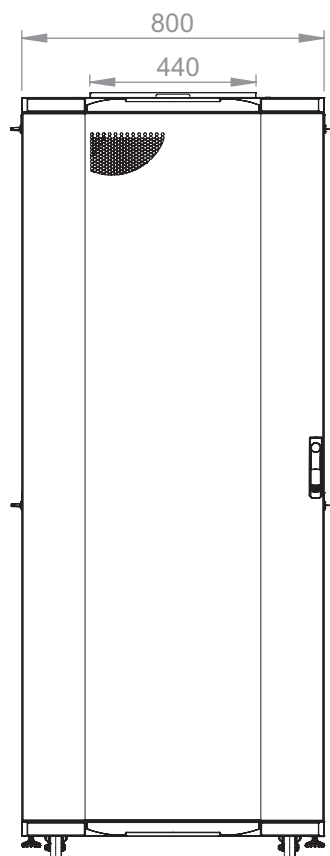

Front view

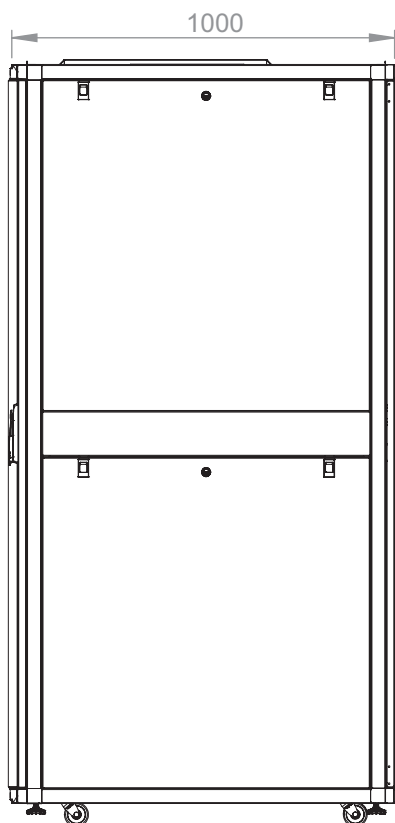

Side view

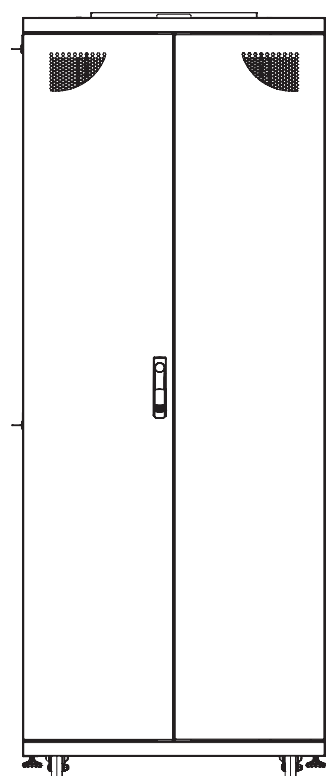

Rear view

19" DYNAmax Series Free Standing Server Cabinets W=800 mm D=1000 mm

Product Number***	Product Description	Size WxDxH mm	h Size in U	h in mm	*H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	**Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-SR36U8010-CC-CFA	36U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x1705	36U	1600	1705	800	19"	1000	720	1	880x1080x1845	117	139	1	880x1080x1845	153
LN-SR42U8010-CC-CFA	42U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x1970	42U	1867	1970	800	19"	1000	720	1	880x1080x2100	128	148	1	880x1080x2100	162
LN-SR45U8010-CC-CFA	45U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x2105	45U	2000	2105	800	19"	1000	720	1	880x1080x2245	137	159	1	880x1080x2245	173
LN-SR47U8010-CC-CFA	47U 19" Free Standing Server Cabinet W=800 mm D=1000 mm	800x1000x2194	47U	2089	2194	800	19"	1000	720	1	880x1080x2334	144	166	1	880x1080x2334	180

* Please add 80 mm to H mm for combined caster and leveling feet for shipping configuration.

** See min and max adjustable depth variations on drawings.


***CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering, for "CFA" selection please see the door options.

19" DYNAmax

Free Standing Server Cabinets

Width: 800 mm
Depth: 1000 mm

Construction Drawings

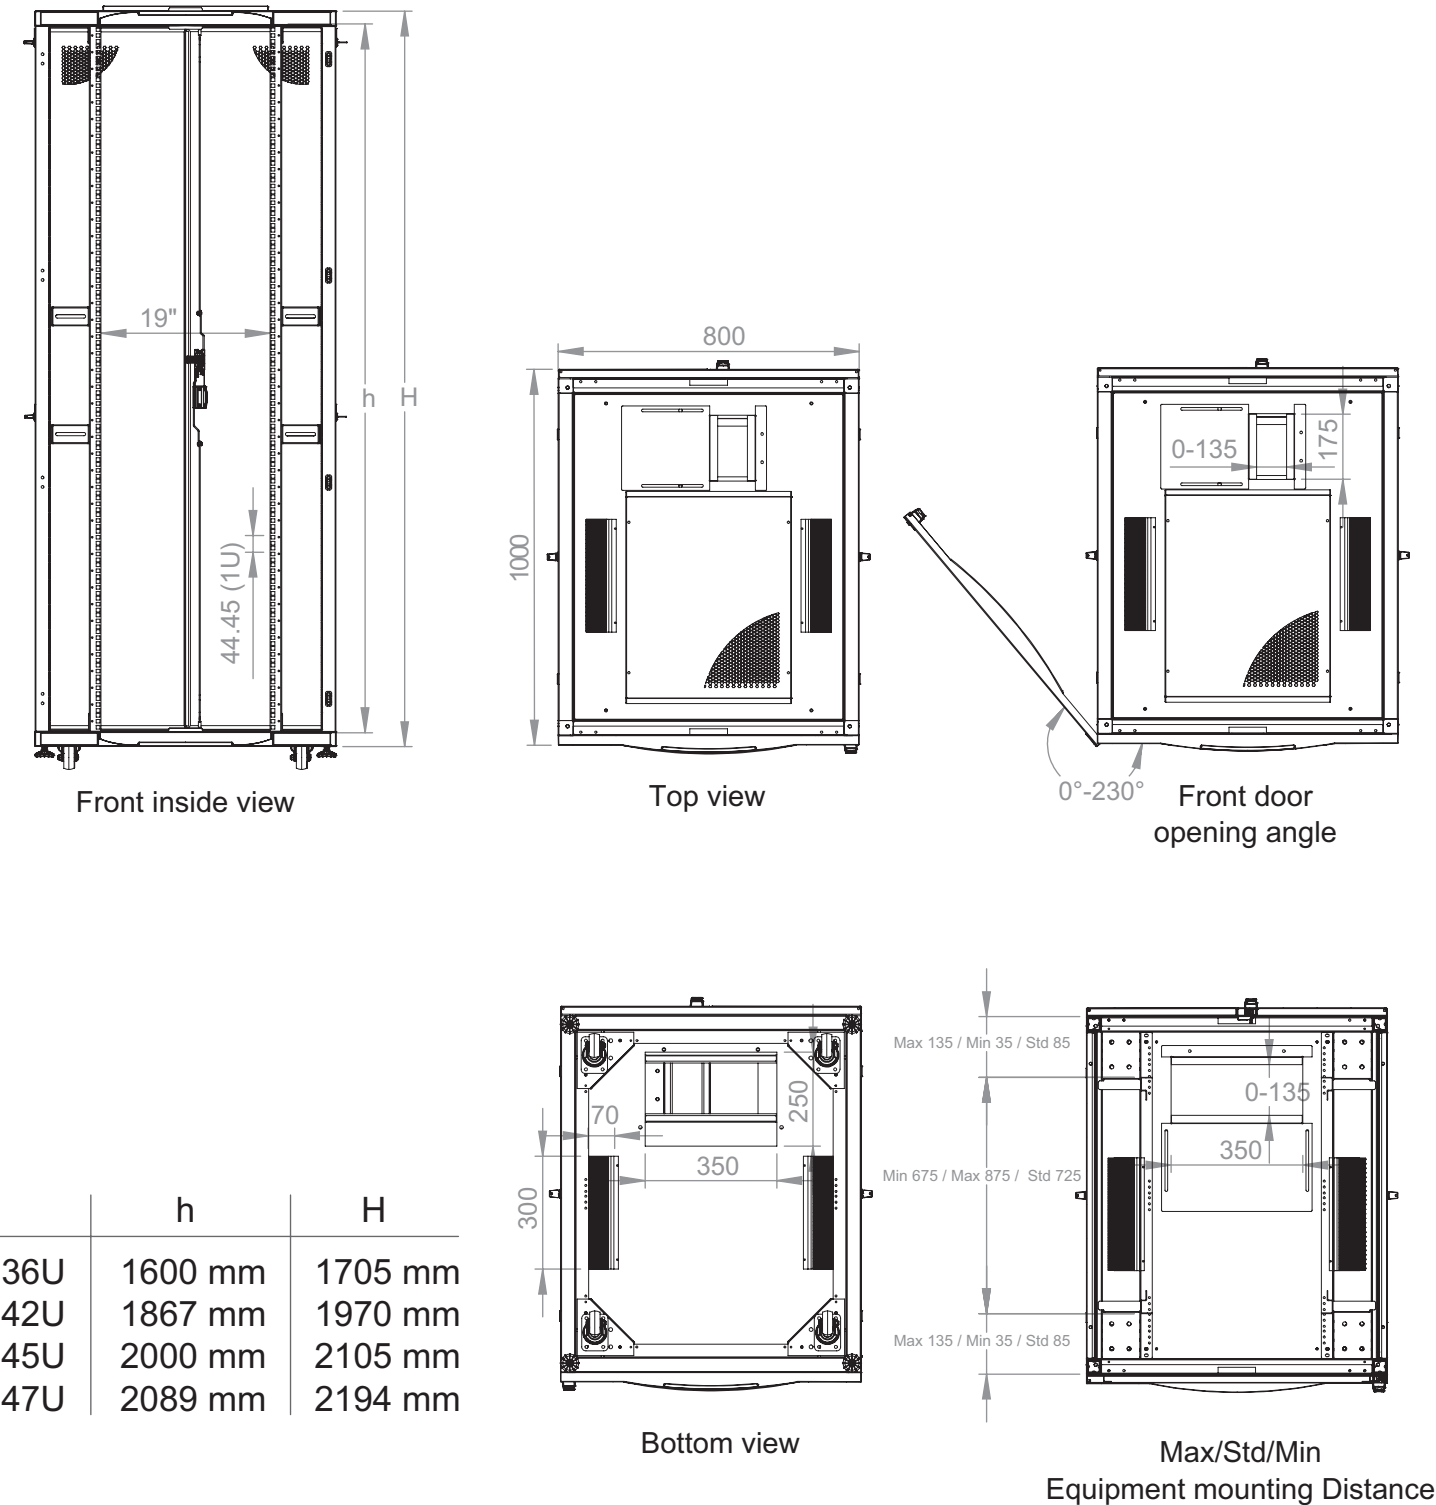


19" DYNAmax

Free Standing Server Cabinets

Width: 800 mm
Depth: 1000 mm

Door Options

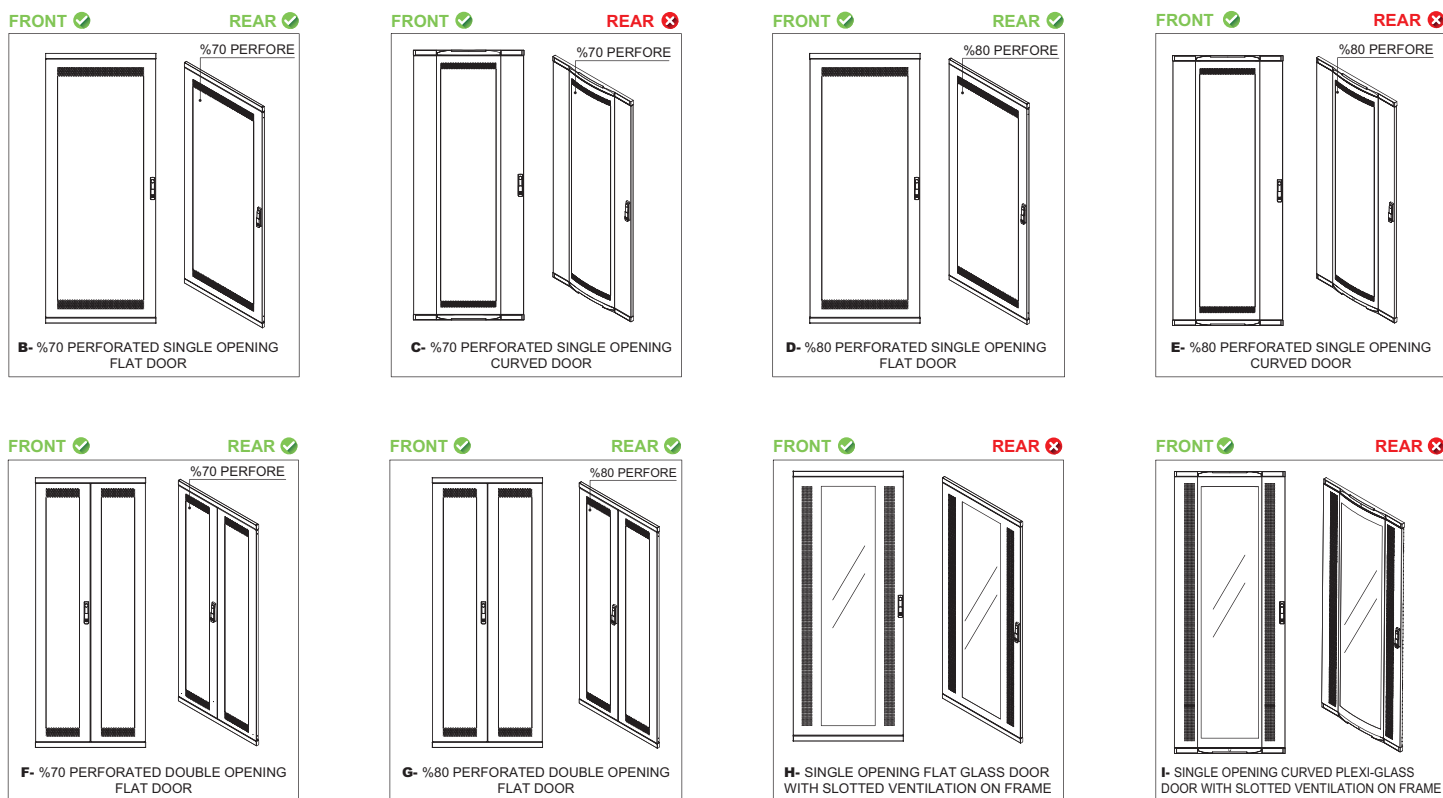

DYNAmax Server Cabinet W=800 mm D=1000 mm All Heights FRONT DOOR Options	DYNAmax Server Cabinet W=800 mm D=1000 mm All Heights REAR DOOR Options	DYNAmax Server Cabinet W=800 mm D=1000 mm All Heights SIDE PANEL Options
B %70 perforated single opening flat door C %70 perforated single opening curved door D %80 perforated single opening flat door E %80 perforated single opening curved door F %70 perforated double opening flat door G %80 perforated double opening flat door H Single opening flat glass door with slotted ventilation on frame I Single opening curved plexi-glass door with slotted ventilation on frame	B %70 perforated single opening flat door D %80 perforated single opening flat door F %70 perforated double opening flat door G %80 perforated double opening flat door	A Both sides equipped with standard side panels B Only left side equipped with side panel C Only right side is equipped with side panel D No side panels on cabinet
LN-AA - XX - WW - DD - CC		0000
LN: Corporate codification beginning letters mentioning Lande in Short Format as LN AA: Family group of enclosure; SR for server enclosure range XX: Numeric character defining the height of enclosures, depending on model differences between 42 to 47 to be selected from price list, website or catalogue U: U height alphanumeric notation, concrete (non editable- fixed character) WW: The first 2 digits of the width info, 60 for W=600 mm, 80 for W=800 mm DD: The first 2 digits of the depth info, 10 for D=1000 mm cabinets CC: Color code, LG for Light Grey RAL 7035, BL for Black RAL 9005		B-C-D-E-F-G-H-I options, unless defined C type door will be in shipping configuration B-D-F-G options, unless defined F type door will be in shipping configuration A both sides equipped with standard side panels B only left side equipped with side panel C only right side is equipped with side panel D no side panels on cabinet