
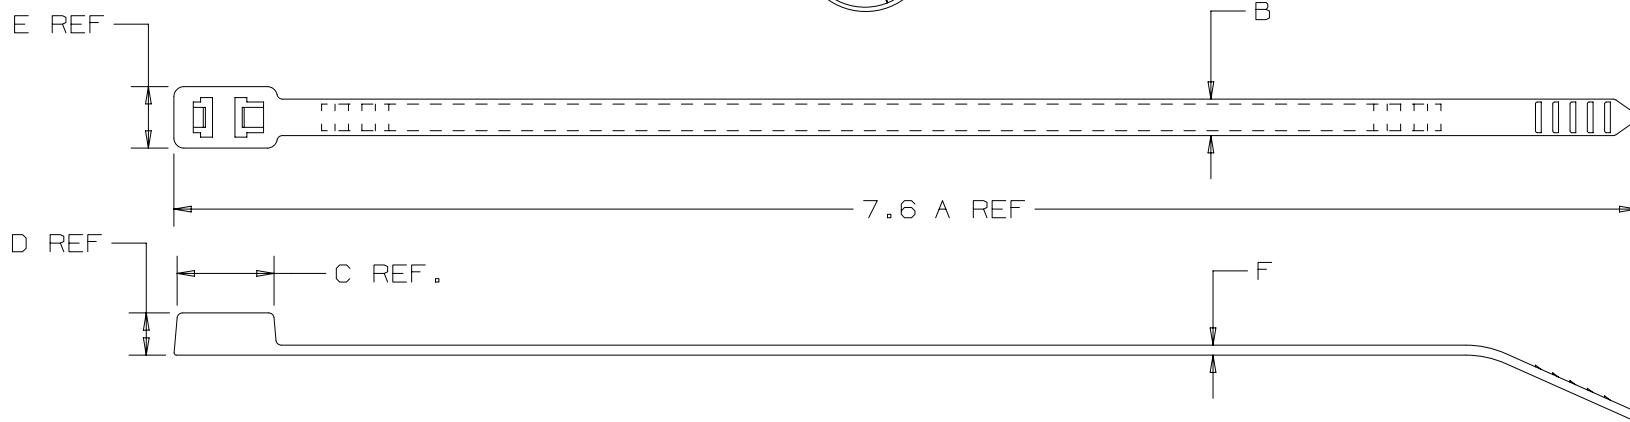


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART NO. *	MAX. COMBINED BUNDLE DIA. D1 + D2 in (mm)	A in (mm)	B in (mm) ±.01 in (±.25mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm) ±.01 in (±.25mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs/100 pcs. (g)
PLB2S-M30	1.8 (45.7)	7.6 (193)	.190 (4.8)	.465 (11.8)	.220 (5.6)	.320 (8.1)	.052 (1.3)	50 (222)	STANDARD	.34 (154)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
03	4/22/14	BWG	MPH	JADE	UPDATED TITLE BORDER AND REPLACED MISSING TOLERANCES.	SS-27025/03	KET	6/4/96	HVP	NONE	SHT 1 OF 1	A

TITLE
PLB2S-M30 BOW-TY CABLE TIE - PLB SERIES

CONTROL DRAWING

ITEM REVISION NAME
SS_27025_02/AB

DATASET FILE NAME
SS_27025_REV03

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)
.x ± --- .xxx ± .020 (.51)
.xx ± .02 (.5) ANGLES ± ---

THIRD ANGLE PROJECTION

MATERIAL:
HEAT STABILIZED BLACK NYLON 6/6

DRAWING NUMBER:
SS-27025

