THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

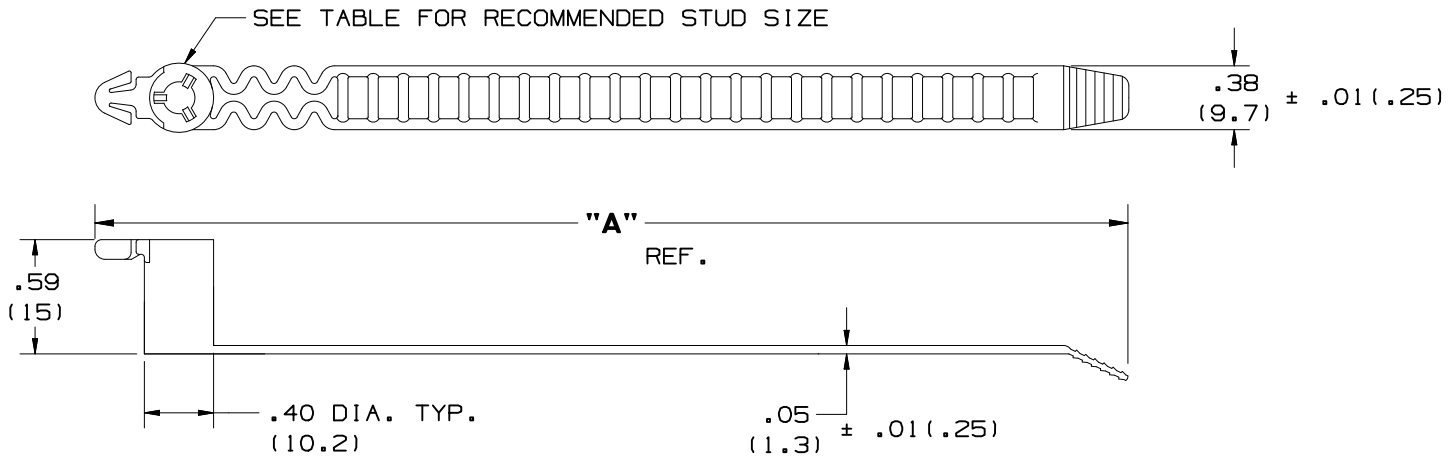

PANDUIT PART * No.	BUNDLE DIA.		"A" in (mm)	MIN. LOOP TENSILE LBS (N)	CROSS SECTION	WEIGHT lbs (g) /100 pcs	RECOMMENDED STUD SIZE	
	MIN. in (mm)	MAX. in (mm)					STUD	LENGTH (min.)
PRST30S-S14-30	.125 (3.2)	1.18 (30)	5.2 (132)	35 (156)	STANDARD	.36 (162)	10-24 (5)	.5 (12 OR 14)
PRST50S-S14-30	.125 (3.2)	1.97 (50)	7.5 (191)	35 (156)	STANDARD	.44 (200)	10-24 (5)	.5 (12 OR 14)

NOTES:

* SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
11	6/28/19	BWG	MPH	JADE	ADDED PRST50S-S14-30 TO DRAWING	049209/00

TITLE

STUD MOUNT CABLE TIE PRST SERIES

CUSTOMER DRAWING

ITEM REVISION NAME: SS_21794/AB

DATASET FILE NAME: SS_21794_DC/AB - SS-21794_REV11

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1(2.5) .XXX ± ____

.XX ± .02 [.5] ANGLES ± ____

THIRD ANGLE PROJECTION

MATERIAL: HEAT STABILIZED BLACK NYLON 6/6

DRAWING NUMBER: SS-21794

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
WKS	6-15-87	HVP	NONE		A

D10100DA/20